


J19P-1

19MM 净水阀芯 - 逆时针旋转

19mm Cartridge For Water Purifier,
Contrarotate

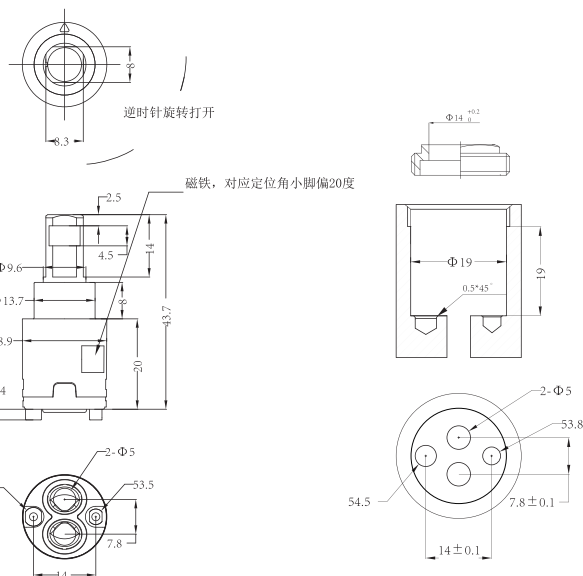



规格参数/Parameters

旋转角度 Turning Angle	90°	瓷片技术要求/Ceramic Disc Data	
最高使用温度 Max.Temperature	90°C	硬度 Hardness	≥1000HV5
爆破压力 Burst Pressure	35Bar	平面度 Flatness	≤0.3um
锁紧扭矩 Nut Torque	4-6N.m	表面粗糙度 Roughness	≤0.2um
拨杆破坏扭矩 Lever Break Torque	≥6N.m	使用寿命 Life Test	
		GB18145/EN817	50.000次周期/Cycles

J30G-11

30MM 高脚空转阀芯 - 上封水

30mm Upper Sealing Cartridge

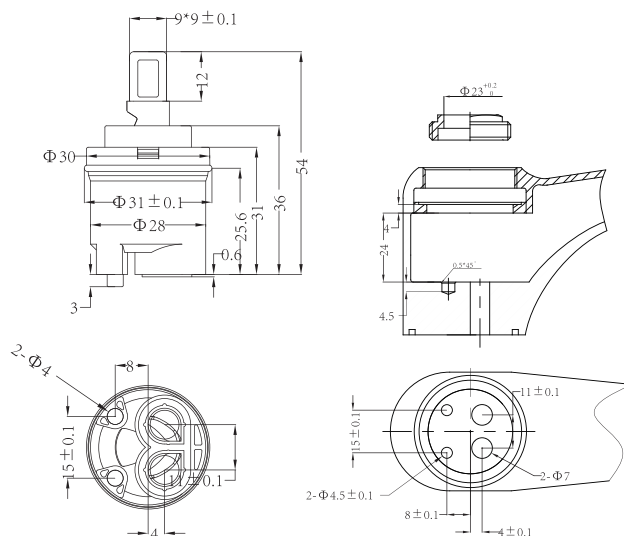

规格参数/Parameters

最大开启角度 Opening Angle	23°	瓷片技术要求/Ceramic Disc Data	
最大旋转角度 Max. Turning Angle	90°	硬度 Hardness	≥1000HV5
最高使用温度 Max.Temperature	90°C	平面度 Flatness	≤0.3um
爆破压力 Burst Pressure	35Bar	表面粗糙度 Roughness	≤0.2um
锁紧扭矩 Nut Torque	8-10N.m	使用寿命 Life Test	
拨杆破坏扭矩 Lever Break Torque	≥16N.m	GB18145/EN817	70.000 次周期/Cycles
		ASME A112.18.1	500.000 次周期/Cycles

J47P-3


47MM 平脚阀芯三档

47mm Standard Cartridge-3 Ways



规格参数/Parameters


最大开启角度 Opening Angle	24°	瓷片技术要求/Ceramic Disc Data	
最大旋转角度 Max. Turning Angle	140°	硬度 Hardness	≥1000HV5
最高使用温度 Max. Temperature	90°C	平面度 Flatness	≤0.3μm
爆破压力 Burst Pressure	35Bar	表面粗糙度 Roughness	≤0.2μm
锁紧扭矩 Nut Torque	8-10N.m	使用寿命 Life Test	
拨杆破坏扭矩 Lever Break Torque	≥12N.m	GB18145/EN817	70.000 次周期/Cycles
		ASME A112.18.1	500.000 次周期/Cycles

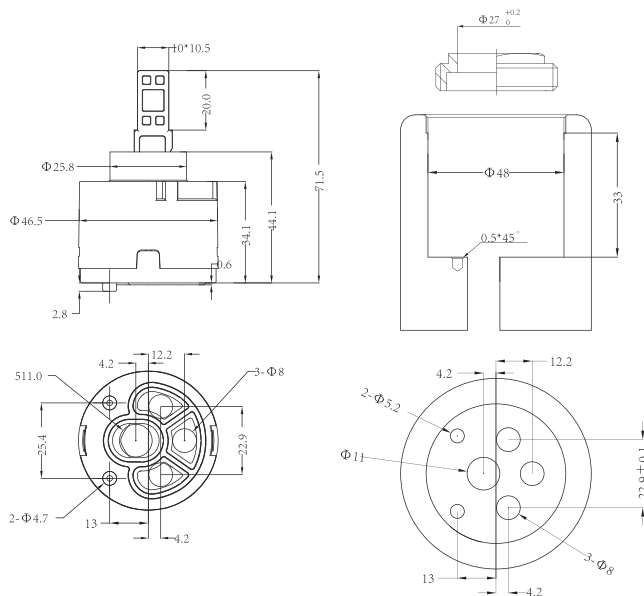

J56-4

56MM 分水阀芯 - 四档

56mm Diverter-4 Ways

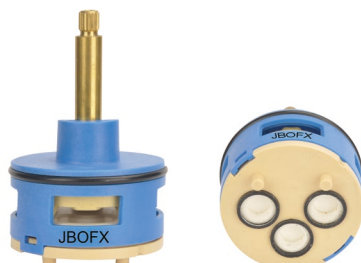

规格参数/Parameters

旋转角度 Turning Angle	360°	瓷片技术要求/Ceramic Disc Data	
最高使用温度 Max. Temperature	90°C	硬度 Hardness	≥1000HV5
爆破压力 Burst Pressure	16Bar	平面度 Flatness	≤0.3um
锁紧扭矩 Nut Torque	8-10N.m	表面粗糙度 Roughness	≤0.2um
拨杆破坏扭矩 Lever Break Torque	≥8N.m	使用寿命 Life Test	
		GB18145/EN817	30.000 次周期/Cycles

